



DZ14S COMMERCIAL

Cooling Capacity: 34,600 to 56,500 BTU/h
Heating Capacity: 32,800 to 59,000 BTU/h

3 - 5 TON, THREE-PHASE
SPLIT SYSTEM HEAT PUMP
14 SEER / R-410A



■ Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data.....	4
Expanded Heating Data	10
AHRI Ratings.....	11
Dimensions.....	14
Wiring Diagram	15
Accessories.....	16

■ Standard Features


- R-410A chlorine-free refrigerant
- Energy-efficient scroll compressor
- Low-pressure switch
- Liquid refrigerant return protection
- Factory-installed, bi-flow liquid-line filter drier
- Service valves with sweat connections and easy-access gauge ports
- Copper tube/enhanced aluminum fin coil
- Reliable time-initiated, temperature-terminated defrost control
- Contactor with lug connection
- Ground lug connection
- Units meet the performance outlined in Table 6.8.1-2 of ASHRAE Standard 90.1-2013
- AHRI Certified; ETL Listed

■ Cabinet Features

- Innovative sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Nickel Gray powder-paint finish
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local distributor or manufacturer's representative or at www.daikincomfort.com.

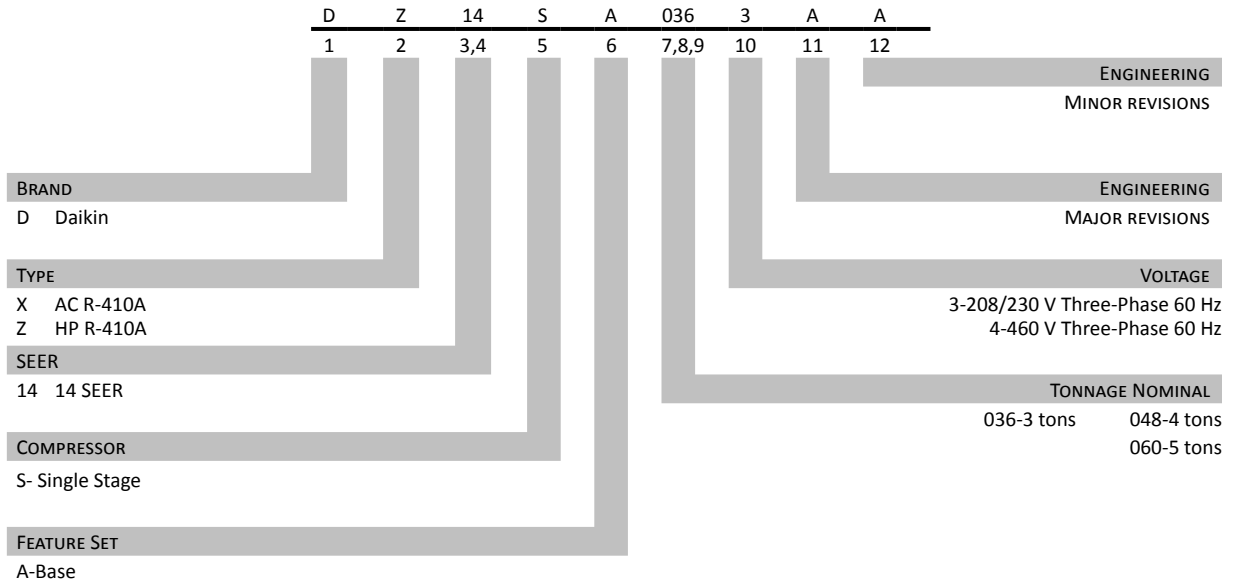

	DZ14SA 0363A*	DZ14SA 0364A*	DZ14SA 0483A*	DZ14SA 0484A*	DZ14SA 0603A*	DZ14SA 0604A*
NOMINAL CAPACITIES						
Cooling (BTU/h)	34,600	34,600	45,000	45,000	56,500	56,500
Heating (BTU/h)	32,800	32,800	44,500	44,500	59,000	59,000
SEER	14	14	14	14	14	14
Decibels	74	74	76	76	75	75
COMPRESSOR						
RLA	11.6	6.4	15.4	6.9	16.0	7.8
LRA	73.0	38.0	83.1	41.0	110.0	52.0
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
CONDENSER FAN MOTOR						
Horsepower	1/6	1/6	1/4	1/4	1/4	1/4
FLA	0.95	0.60	1.50	0.80	1.50	0.80
REFRIGERATION SYSTEM						
Refrigerant Line Size						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	7/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{3 4}	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	112	112	133	133	205	205
Shipped with Orifice Size	0.072	0.072	0.080	0.080	0.088	0.088
ELECTRICAL DATA						
Volts / Hz / Phase	208/230-60-3	460-60-3	208/230-60-3	460-60-3	208/230-60-3	460-60-3
Min. Circuit Ampacity ¹	14.1	7.8	18.7	8.6	21.5	10.6
Max. Overcurrent Device ²	20	15	30	15	35	15
Min / Max Volts	197/253	414/506	197/253	414/506	197/253	414/506
Electrical Conduit Size	1/2" or 3/8"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
SHIP WEIGHT (LBS)						
	232	231	235	234	262	261

¹ Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

³ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁴ Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

IDB		OUTDOOR AMBIENT TEMPERATURE																											
		65					75					85					95					105					115		
AIRFLOW		ENTERING INDOOR WET BULB TEMPERATURE																											
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	45.9	46.5	47.9	-	45.5	46.1	47.5	-	44.3	44.9	46.3	-	42.2	42.9	44.2	-	39.7	40.4	41.7	-	37.4	38.1	39.4	-	37.9	38.6	39.9	-
	S/T	0.64	0.56	0.42	-	0.65	0.57	0.43	-	0.67	0.59	0.45	-	0.69	0.61	0.47	-	1.00	0.64	0.50	-	1.00	0.69	0.54	-	1.00	0.74	0.60	-
	Delta T	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-
	KW	2.79	2.78	2.78	-	3.11	3.10	3.10	-	3.46	3.46	3.46	-	3.85	3.85	3.84	-	4.28	4.28	4.28	-	4.79	4.79	4.78	-	4.79	4.79	4.78	-
	AMPS	10.2	10.2	10.2	-	11.7	11.7	11.6	-	13.3	13.3	13.3	-	15.1	15.1	15.0	-	17.1	17.0	17.0	-	19.4	19.4	19.3	-	19.4	19.4	19.3	-
	LO PR	122	124	127	-	130	131	134	-	136	138	141	-	142	143	146	-	147	149	152	-	154	156	159	-	154	156	159	-
1400	MBh	46.4	47.0	48.4	-	46.0	46.6	48.0	-	44.8	45.4	46.8	-	42.7	43.4	44.7	-	40.2	40.9	42.2	-	37.9	38.6	39.9	-	37.9	38.6	39.9	-
	S/T	0.69	0.61	0.47	-	0.69	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.69	0.54	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-
	Delta T	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	19	17	14	-	19	17	14	-
	KW	2.80	2.80	2.79	-	3.12	3.12	3.11	-	3.48	3.48	3.47	-	3.87	3.86	3.86	-	4.30	4.30	4.29	-	4.80	4.80	4.80	-	4.80	4.80	4.80	-
	AMPS	10.3	10.3	10.2	-	11.7	11.7	11.7	-	13.4	13.4	13.3	-	15.1	15.1	15.1	-	17.1	17.1	17.1	-	19.4	19.4	19.4	-	19.4	19.4	19.4	-
	LO PR	124	125	129	-	131	133	136	-	138	139	142	-	143	145	148	-	149	150	153	-	155	157	160	-	155	157	160	-
1800	MBh	47.3	47.9	49.3	-	46.9	47.5	48.9	-	45.7	46.3	47.7	-	43.6	44.3	45.6	-	41.1	41.8	43.1	-	38.8	39.5	40.8	-	38.8	39.5	40.8	-
	S/T	0.73	0.65	0.51	-	0.73	0.66	0.52	-	0.76	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.72	0.58	-	1.00	0.78	0.64	-	1.00	0.78	0.64	-
	Delta T	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	18	16	13	-	18	16	13	-
	KW	2.82	2.81	2.81	-	3.14	3.14	3.13	-	3.50	3.49	3.49	-	3.88	3.88	3.87	-	4.31	4.31	4.31	-	4.82	4.82	4.81	-	4.82	4.82	4.81	-
	AMPS	10.3	10.3	10.3	-	11.8	11.8	11.8	-	13.4	13.4	13.4	-	15.2	15.2	15.2	-	17.2	17.2	17.2	-	19.5	19.5	19.5	-	19.5	19.5	19.5	-
	LO PR	260	261	263	-	300	302	303	-	343	344	346	-	388	389	391	-	437	438	440	-	489	491	492	-	489	491	492	-
75	MBh	45.9	46.6	47.9	50.0	45.5	46.1	47.5	49.6	44.3	45.0	46.3	48.4	42.2	42.9	44.3	46.4	39.7	40.4	41.7	43.8	37.4	38.1	39.5	41.5	37.9	38.6	40.0	42.0
	S/T	0.77	0.69	0.55	0.41	0.78	0.70	0.56	0.41	1.00	0.73	0.59	0.44	1.00	0.75	0.61	0.46	1.00	0.77	0.63	0.48	1.00	1.00	0.68	0.54	1.00	1.00	0.73	0.58
	Delta T	23	21	18	14	23	21	18	14	23	21	18	14	23	21	18	14	22	21	17	14	24	22	19	15	24	22	18	14
	KW	2.79	2.78	2.78	2.80	3.11	3.10	3.10	3.12	3.46	3.46	3.45	3.48	3.85	3.85	3.84	3.87	4.28	4.28	4.27	4.30	4.79	4.79	4.78	4.81	4.79	4.79	4.78	4.81
	AMPS	10.2	10.2	10.2	10.3	11.7	11.6	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.1	15.0	15.1	17.0	17.0	17.0	17.1	19.4	19.4	19.3	19.4	19.4	19.4	19.4	19.5
	LO PR	122	124	127	132	130	131	134	140	136	138	141	146	142	143	146	152	147	149	152	157	154	156	159	164	154	156	159	164
1400	MBh	46.4	47.1	48.4	50.5	46.0	46.6	48.0	50.1	44.8	45.5	46.8	48.9	42.7	43.4	44.8	46.9	40.2	40.9	42.2	44.3	37.9	38.6	40.0	42.0	37.9	38.6	40.0	42.0
	S/T	0.82	0.74	0.60	0.46	0.83	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.58	1.00	1.00	0.73	0.58
	Delta T	22	20	17	13	22	20	17	13	22	20	17	14	22	20	17	13	22	20	17	14	23	21	18	14	23	21	18	14
	KW	2.80	2.80	2.79	2.81	3.12	3.12	3.11	3.14	3.48	3.47	3.47	3.49	3.86	3.86	3.86	3.88	4.30	4.29	4.29	4.31	4.80	4.80	4.79	4.82	4.80	4.80	4.79	4.82
	AMPS	10.3	10.2	10.2	10.3	11.7	11.7	11.7	11.8	13.4	13.3	13.3	13.4	15.1	15.1	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	19.4	19.4	19.4	19.5
	LO PR	258	259	261	265	298	299	301	305	340	341	343	348	386	387	389	393	435	436	438	442	487	488	488	494	487	488	488	494
1800	MBh	47.3	48.0	49.3	51.4	46.9	47.6	48.9	51.0	45.7	46.4	47.7	49.8	43.7	44.3	45.7	47.8	41.1	41.8	43.2	45.2	38.8	39.5	40.9	43.0	38.8	39.5	40.9	43.0
	S/T	0.86	0.78	0.64	0.50	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	0.86	0.72	0.57	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62
	Delta T	21	19	16	12	21	19	16	12	21	19	16	13	21	19	16	12	21	19	15	12	22	20	17	13	22	20	17	13
	KW	2.82	2.81	2.81	2.83	3.14	3.13	3.13	3.15	3.49	3.49	3.49	3.51	3.88	3.88	3.87	3.90	4.31	4.31	4.30	4.33	4.82	4.82	4.81	4.84	4.82	4.82	4.81	4.84
	AMPS	10.3	10.3	10.3	10.4	11.8	11.8	11.8	11.9	13.4	13.4	13.4	13.5	15.2	15.2	15.2	15.3	17.2	17.2	17.1	17.3	19.5	19.5	19.5	19.6	19.5	19.5	19.5	19.6
	LO PR	260	261	263	268	301	302	304	308	343	344	346	350	388	389	391	396	437	438	440	445	490	491	493	497	490	491	493	497

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area is ACCA (ITVA) conditions.

KW=Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
1790	MBh	58.2	59.0	60.8	-	57.7	58.5	60.3	-	56.2	57.0	58.8	-	53.6	54.5	56.2	-	50.5	51.3	53.0	-	47.6	48.4	50.1	-
	S/T	0.67	0.59	0.46	-	0.67	0.60	0.46	-	0.70	0.62	0.49	-	0.72	0.64	0.51	-	0.74	0.67	0.53	-	1.00	0.72	0.58	-
	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	14	-
	kW	3.35	3.35	3.34	-	3.78	3.78	3.77	-	4.25	4.25	4.24	-	4.76	4.76	4.75	-	5.34	5.33	5.33	-	6.01	6.00	6.00	-
	Amps	13.2	13.2	13.1	-	15.1	15.1	15.1	-	17.3	17.3	17.2	-	19.6	19.6	19.6	-	22.2	22.2	22.2	-	25.3	25.3	25.3	-
2000	HI PR	258	259	261	-	298	299	301	-	340	341	343	-	386	387	389	-	435	436	438	-	487	488	490	-
	LO PR	116	118	121	-	123	125	128	-	130	131	134	-	135	136	139	-	140	141	144	-	146	148	150	-
	MBh	59.1	59.9	61.6	-	58.6	59.4	61.1	-	57.1	57.9	59.6	-	54.5	55.3	57.0	-	51.3	52.1	53.9	-	48.4	49.3	51.0	-
	S/T	0.70	0.62	0.49	-	0.71	0.63	0.49	-	0.73	0.66	0.52	-	0.75	0.68	0.54	-	0.77	0.70	0.56	-	1.00	0.75	0.61	-
	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	14	-
2250	kW	3.37	3.37	3.36	-	3.80	3.79	3.79	-	4.27	4.27	4.26	-	4.78	4.78	4.77	-	5.35	5.35	5.34	-	6.03	6.02	6.01	-
	Amps	13.2	13.2	13.2	-	15.2	15.2	15.1	-	17.4	17.3	17.3	-	19.7	19.7	19.6	-	22.3	22.3	22.3	-	25.4	25.4	25.3	-
	HI PR	260	261	263	-	300	301	303	-	342	343	345	-	388	389	391	-	437	438	440	-	489	490	492	-
	LO PR	118	120	123	-	125	127	130	-	131	133	136	-	136	138	141	-	142	143	146	-	148	149	152	-
	MBh	60.3	61.1	62.8	-	59.8	60.6	62.3	-	58.3	59.1	60.8	-	55.7	56.5	58.2	-	52.5	53.4	55.1	-	49.7	50.5	52.2	-

		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
1790	MBh	58.3	59.1	60.8	63.4	57.8	58.6	60.3	62.9	56.3	57.1	58.8	61.4	53.7	54.5	56.2	58.8	50.5	51.3	53.0	55.7	47.6	48.4	50.2	52.8
	S/T	0.80	0.72	0.59	0.44	0.80	0.73	0.59	0.45	0.83	0.75	0.62	0.47	1.00	0.77	0.64	0.49	1.00	0.79	0.66	0.52	1.00	0.85	0.71	0.57
	ΔT	23	21	18	14	23	21	18	14	23	21	18	14	23	21	18	14	23	21	17	14	24	22	19	15
	kW	3.35	3.35	3.34	3.37	3.78	3.77	3.77	3.80	4.25	4.25	4.24	4.27	4.76	4.76	4.75	4.78	5.33	5.33	5.32	5.36	6.01	6.00	5.99	6.03
	Amps	13.2	13.1	13.1	13.3	15.1	15.1	15.0	15.2	17.3	17.2	17.2	17.4	19.6	19.6	19.6	19.7	22.2	22.2	22.2	22.3	25.3	25.3	25.2	25.4
2000	HI PR	258	259	261	265	298	299	301	306	340	341	343	348	386	387	389	393	435	436	438	442	487	488	490	495
	LO PR	116	118	121	126	123	125	128	133	130	131	134	139	135	136	139	144	140	141	144	149	146	148	150	155
	MBh	59.1	59.9	61.6	64.3	58.6	59.4	61.1	63.8	57.1	57.9	59.6	62.3	54.5	55.3	57.0	59.7	51.4	52.2	53.9	56.5	48.5	49.3	51.0	53.6
	S/T	0.83	0.75	0.62	0.47	0.84	0.76	0.62	0.48	0.86	0.79	0.65	0.51	1.00	0.81	0.67	0.53	1.00	0.83	0.69	0.55	1.00	0.88	0.74	0.60
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	18	14
2250	kW	3.37	3.37	3.36	3.39	3.79	3.79	3.78	3.82	4.27	4.26	4.26	4.29	4.78	4.78	4.77	4.80	5.35	5.35	5.34	5.37	6.02	6.01	6.01	6.04
	Amps	13.2	13.2	13.2	13.3	15.2	15.2	15.1	15.3	17.3	17.3	17.3	17.4	19.7	19.7	19.6	19.8	22.3	22.3	22.3	22.4	25.4	25.4	25.3	25.5
	HI PR	260	261	263	267	300	301	303	307	342	343	345	350	388	389	391	395	437	438	440	444	489	490	492	497
	LO PR	118	120	123	127	125	127	130	134	131	133	136	141	136	138	141	146	142	143	146	151	148	149	152	157
	MBh	60.3	61.1	62.9	65.5	59.8	60.6	62.3	65.0	58.3	59.1	60.8	63.5	55.7	56.5	58.3	60.9	52.6	53.4	55.1	57.7	49.7	50.5	52.2	54.9

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions.
 kW=Total system power
 Amps = outdoor unit amps (comp.+fan)

DZ14SA0363A*+ARUF37C14A*+TXV • DZ14SA0364A*+ARUF37C14A*+TXV

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	42.72	39.94	37.21	34.52	32.80	31.52	28.28	25.30	22.87	21.06	19.72	19.00	18.08	15.78	13.48	11.18	8.88	9.7
T/R	37.0	34.6	32.2	29.9	28.4	27.3	24.5	21.9	19.8	18.2	17.1	16.4	15.6	13.7	11.7	9.7	7.7	9.0
kW	2.81	2.76	2.71	2.66	2.63	2.61	2.56	2.50	2.45	2.40	2.35	2.32	2.30	2.25	2.20	2.15	2.10	1.93
Amps	13.6	12.5	11.6	10.8	10.3	10.0	9.4	8.9	8.4	7.9	7.5	7.3	7.1	6.6	6.2	5.7	5.1	5.9
COP	4.46	4.24	4.03	3.81	3.66	3.55	3.24	2.96	2.73	2.57	2.46	2.40	2.30	2.06	1.80	1.53	1.24	1.25

DZ14SA0483A*+ARUF61D14A*+TXV • DZ14SA0484A*+ARUF61D14A*+TXV

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	56.58	53.20	49.88	46.61	44.50	42.97	39.18	35.56	32.58	30.41	28.84	28.00	26.90	24.15	21.40	18.65	15.90	12.6
T/R	33.7	31.7	29.7	27.8	26.5	25.6	23.3	21.2	19.4	18.1	17.2	16.7	16.0	14.4	12.7	11.1	9.5	8.1
kW	3.51	3.48	3.44	3.40	3.38	3.36	3.33	3.29	3.25	3.22	3.18	3.16	3.14	3.10	3.07	3.03	2.99	2.32
Amps	17.2	15.8	14.6	13.6	13.0	12.6	11.8	11.1	10.5	9.9	9.4	9.0	8.8	8.2	7.6	7.0	6.2	7.3
COP	4.72	4.49	4.25	4.02	3.86	3.74	3.45	3.17	2.94	2.77	2.66	2.60	2.51	2.28	2.04	1.80	1.56	1.26

DZ14SA0603A*+ASPT61D14A*+TXV • DZ14SA0604A*+ASPT61D14A*+TXV

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	75.71	71.04	66.44	61.91	59.00	56.89	51.54	46.52	42.41	39.39	37.18	36.00	34.47	30.63	26.80	22.97	19.13	12.6
T/R	38.9	36.5	34.2	31.8	30.3	29.3	26.5	23.9	21.8	20.3	19.1	18.5	17.7	15.8	13.8	11.8	9.8	8.1
kW	4.91	4.79	4.67	4.55	4.48	4.43	4.31	4.20	4.08	3.96	3.84	3.77	3.72	3.60	3.48	3.36	3.25	2.32
Amps	23.4	21.5	19.8	18.4	17.6	17.2	16.1	15.1	14.3	13.5	12.8	12.3	12.0	11.2	10.4	9.5	8.5	7.3
COP	4.52	4.35	4.17	3.99	3.86	3.76	3.50	3.25	3.05	2.92	2.84	2.80	2.71	2.49	2.25	2.00	1.73	1.26

Calculations are based on nominal CFM and 70°F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature.

kW = Total system power

OUTDOOR UNIT	INDOOR UNITS COILS/AIR HANDLERS	COOLING RATINGS ^				TVA RATINGS ³		HEATING RATINGS ^			CFM	AHRI #
		TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
DZ14SA 0363A*	ARUF37C14A*+TXV	34,600	25,600	14.00	11.50	33,400	25,000	32,800	8.20	19,000	1,010	9121538
	ARUF37D14A*	34,400	25,400	14.00	11.50	33,200	24,800	32,800	8.20	20,000	1,070	9121539
	ASPT37B14A*	34,000	25,200	14.00	12.00	32,800	24,600	32,600	8.20	20,000	1,120	9121583
	ASPT37C14A*	34,600	25,600	14.50	12.00	33,400	25,000	32,600	8.50	20,000	1,120	9121584
	ASPT47C14A*	34,400	25,400	14.50	12.00	33,200	24,800	32,600	8.50	20,000	1,075	9121585
	ASPT47D14A*	34,800	25,800	15.00	12.50	33,600	25,200	32,600	8.50	20,000	1,180	9121586
	CA*F3137*6A*+MBVC1200**-1A*+TXV	34,600	25,600	14.00	11.50	33,400	25,000	32,000	8.20	19,000	1,050	9121591
	CA*F4860*6D*+MBVC2000**-1A*	35,600	26,400	14.50	12.00	34,200	25,800	32,800	9.00	20,000	1,160	9121541
	CA*F4860*6D*+MBVC2000**-1A*+TXV	35,600	26,400	15.00	12.50	34,200	25,800	32,800	9.00	20,000	1,160	9121542
	CA*F4961*6D*+EEP+TXV	35,400	26,200	14.00	11.50	34,000	25,600	33,200	8.20	20,600	1,070	9121543
	CA*F4961*6D*+MBVC1200**-1A*	35,600	26,400	14.50	12.00	34,200	25,800	32,400	8.50	20,000	1,050	9121544
	CA*F4961*6D*+MBVC1200**-1A*+TXV	35,600	26,400	15.00	12.50	34,200	25,800	32,400	8.50	20,000	1,050	9121545
	CA*F4961*6D*+MBVC1600**-1A*	35,600	26,400	14.50	12.00	34,200	25,800	32,400	8.50	20,000	1,075	9121546
	CA*F4961*6D*+MBVC1600**-1A*+TXV	35,600	26,400	15.00	12.50	34,200	25,800	32,400	8.50	20,000	1,075	9121547
	CAPT4961*4A*+EEP	34,600	25,600	14.00	11.50	33,400	25,000	33,200	8.20	20,600	1,070	9121590
	CHPF3743C6B*+EEP+TXV	34,600	25,600	14.00	11.50	33,400	25,000	33,000	8.20	20,000	1,080	9121534
	CHPF4860D6D*+MBVC1600**-1A*	35,400	26,200	14.50	12.00	34,000	25,600	32,400	8.50	20,000	1,075	9121548
	CHPF4860D6D*+MBVC1600**-1A*+TXV	35,400	26,200	15.00	12.50	34,000	25,600	32,400	8.50	20,000	1,075	9121549
	CHPF4860D6D*+MBVC2000**-1A*	36,000	26,600	14.50	12.00	34,600	26,000	32,600	8.50	20,000	1,275	9121550
	CHPF4860D6D*+MBVC2000**-1A*+TXV	36,000	26,600	15.00	12.50	34,600	26,000	32,600	8.50	20,000	1,275	9121551
CSCF4860N6D*+EEP+TXV	34,600	25,600	14.00	11.50	33,400	25,000	33,000	8.20	20,000	1,080	9121535	
CSCF4860N6D*+MBVC1200**-1A*	35,000	26,000	14.00	11.50	33,800	25,200	32,000	8.50	20,000	1,050	9121552	
CSCF4860N6D*+MBVC1200**-1A*+TXV	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,050	9121553	
CSCF4860N6D*+MBVC1600**-1A*	35,400	26,200	14.50	12.00	34,000	25,600	32,400	8.50	20,000	1,075	9121554	
CSCF4860N6D*+MBVC1600**-1A*+TXV	35,400	26,200	15.00	12.50	34,000	25,600	32,400	8.50	20,000	1,075	9121555	
CSCF4860N6D*+MBVC2000**-1A*	36,000	26,600	14.50	12.00	34,600	26,000	32,600	8.50	20,000	1,275	9121556	
CSCF4860N6D*+MBVC2000**-1A*+TXV	36,000	26,600	15.00	12.50	34,600	26,000	32,600	8.50	20,000	1,275	9121557	
DZ14SA 0364A*	ARUF37C14A*+TXV	34,600	25,600	14.00	11.50	33,400	25,000	32,800	8.20	19,000	1,010	9121604
	ARUF37D14A*	34,400	25,400	14.00	11.50	33,200	24,800	32,800	8.20	20,000	1,070	9121605
	ASPT37B14A*	34,000	25,200	14.00	12.00	32,800	24,600	32,600	8.20	20,000	1,120	9121649
	ASPT37C14A*	34,600	25,600	14.50	12.00	33,400	25,000	32,600	8.50	20,000	1,120	9121650
	ASPT47C14A*	34,400	25,400	14.50	12.00	33,200	24,800	32,600	8.50	20,000	1,075	9121651
	ASPT47D14A*	34,800	25,800	15.00	12.50	33,600	25,200	32,600	8.50	20,000	1,180	9121652
	CA*F3137*6A*+MBVC1200**-1A*+TXV	34,600	25,600	14.00	11.50	33,400	25,000	32,000	8.20	19,000	1,050	9121657
	CA*F4860*6D*+MBVC2000**-1A*	35,600	26,400	14.50	12.00	34,200	25,800	32,800	9.00	20,000	1,160	9121607
	CA*F4860*6D*+MBVC2000**-1A*+TXV	35,600	26,400	15.00	12.50	34,200	25,800	32,800	9.00	20,000	1,160	9121608
	CA*F4961*6D*+EEP+TXV	35,400	26,200	14.00	11.50	34,000	25,600	33,200	8.20	20,600	1,070	9121609
	CA*F4961*6D*+MBVC1200**-1A*	35,600	26,400	14.50	12.00	34,200	25,800	32,400	8.50	20,000	1,050	9121610

^ Rated in accordance with ANSI/AHRI Standard 210/240

¹ Seasonal Energy Efficiency Ratio

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁵ HSPF = Heating Seasonal Performance Factor

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

⁴ Rated heating capacity at 47°F outdoor per AHRI 210/240

⁶ Heating capacity at 17°F outdoor

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Daikin Gas Furnace contains the EEP cooling time delay

OUTDOOR UNIT	INDOOR UNITS	COOLING RATINGS ^				TVA RATINGS ³		HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
DZ14SA 0364A* (cont.)	CA*F4961*6D*+MBVC1200**-1A*+TXV	35,600	26,400	15.00	12.50	34,200	25,800	32,400	8.50	20,000	1,050	9121611
	CA*F4961*6D*+MBVC1600**-1A*	35,600	26,400	14.50	12.00	34,200	25,800	32,400	8.50	20,000	1,075	9121612
	CA*F4961*6D*+MBVC1600**-1A*+TXV	35,600	26,400	15.00	12.50	34,200	25,800	32,400	8.50	20,000	1,075	9121613
	CAPT4961*4A*+EEP	34,600	25,600	14.00	11.50	33,400	25,000	33,200	8.20	20,600	1,070	9121656
	CHPF3743C6B*+EEP+TXV	34,600	25,600	14.00	11.50	33,400	25,000	33,000	8.20	20,000	1,080	9121600
	CHPF4860D6D*+MBVC1600**-1A*	35,400	26,200	14.50	12.00	34,000	25,600	32,400	8.50	20,000	1,075	9121614
	CHPF4860D6D*+MBVC1600**-1A*+TXV	35,400	26,200	15.00	12.50	34,000	25,600	32,400	8.50	20,000	1,075	9121615
	CHPF4860D6D*+MBVC2000**-1A*	36,000	26,600	14.50	12.00	34,600	26,000	32,600	8.50	20,000	1,275	9121616
	CHPF4860D6D*+MBVC2000**-1A*+TXV	36,000	26,600	15.00	12.50	34,600	26,000	32,600	8.50	20,000	1,275	9121617
	CSCF4860N6D*+EEP+TXV	34,600	25,600	14.00	11.50	33,400	25,000	33,000	8.20	20,000	1,080	9121601
	CSCF4860N6D*+MBVC1200**-1A*	35,000	26,000	14.00	11.50	33,800	25,200	32,000	8.50	20,000	1,050	9121618
	CSCF4860N6D*+MBVC1200**-1A*+TXV	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,050	9121619
	CSCF4860N6D*+MBVC1600**-1A*	35,400	26,200	14.50	12.00	34,000	25,600	32,400	8.50	20,000	1,075	9121620
	CSCF4860N6D*+MBVC1600**-1A*+TXV	35,400	26,200	15.00	12.50	34,000	25,600	32,400	8.50	20,000	1,075	9121621
CSCF4860N6D*+MBVC2000**-1A*	36,000	26,600	14.50	12.00	34,600	26,000	32,600	8.50	20,000	1,275	9121622	
CSCF4860N6D*+MBVC2000**-1A*+TXV	36,000	26,600	15.00	12.50	34,600	26,000	32,600	8.50	20,000	1,275	9121623	
DZ14SA 0483A*	ARUF49D14A*+TXV	44,000	34,800	14.00	11.50	42,500	34,000	44,000	8.50	27,600	1,450	9121599
	ARUF61D14A*+TXV	45,000	35,600	14.00	11.50	43,500	34,800	44,500	8.50	28,000	1,555	9121558
	ASPT49D14A*	44,500	35,200	14.50	12.00	43,000	34,400	44,000	8.50	27,600	1,430	9121587
	ASPT59C14A*	45,000	35,600	14.00	12.00	43,500	34,800	44,500	8.20	27,600	1,430	9121588
	ASPT61D14A*	45,000	35,600	14.50	12.00	43,500	34,800	44,500	8.50	27,600	1,555	9121589
	CA*F4961*6D*+EEP+TXV	45,000	35,600	14.00	11.50	43,500	34,800	45,000	9.00	27,600	1,555	9121559
	CA*F4961*6D*+MBVC1600**-1A*	45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,500	9121560
	CA*F4961*6D*+MBVC1600**-1A*+TXV	45,500	36,000	15.00	12.50	44,000	35,000	44,500	9.00	27,600	1,500	9121561
	CA*F4961*6D*+MBVC2000**-1A*	46,000	36,400	14.50	12.00	44,500	35,400	44,500	9.00	27,600	1,570	9121562
	CA*F4961*6D*+MBVC2000**-1A*+TXV	46,000	36,400	15.00	12.50	44,500	35,400	44,500	9.00	27,600	1,570	9121563
	CHPF4860D6D*+EEP+TXV	45,000	35,600	14.00	11.50	43,500	34,800	44,500	9.00	27,600	1,555	9121564
	CHPF4860D6D*+MBVC1600**-1A*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,500	9121565
	CHPF4860D6D*+MBVC1600**-1A*+TXV	45,000	35,600	15.00	12.50	43,500	34,800	44,000	9.00	27,600	1,500	9121566
	CHPF4860D6D*+MBVC2000**-1A*	45,500	36,000	14.50	12.00	44,000	35,000	44,000	9.00	27,600	1,570	9121567
CHPF4860D6D*+MBVC2000**-1A*+TXV	45,500	36,000	15.00	12.50	44,000	35,000	44,000	9.00	27,600	1,570	9121568	
CSCF4860N6D*+EEP+TXV	45,000	35,600	14.00	11.50	43,500	34,800	45,000	9.00	27,600	1,555	9121569	
CSCF4860N6D*+MBVC1600**-1A*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,500	9121570	
CSCF4860N6D*+MBVC1600**-1A*+TXV	45,000	35,600	15.00	12.00	43,500	34,800	44,000	9.00	27,600	1,500	9121571	
CSCF4860N6D*+MBVC2000**-1A*	45,500	36,000	14.00	12.00	44,000	35,000	44,000	9.00	27,600	1,570	9121572	
CSCF4860N6D*+MBVC2000**-1A*+TXV	45,500	36,000	15.00	12.50	44,000	35,000	44,000	9.00	27,600	1,570	9121573	
DZ14SA 0484A*	ARUF49D14A*+TXV	44,000	34,800	14.00	11.50	42,500	34,000	44,000	8.50	27,600	1,450	9121665
	ARUF61D14A*+TXV	45,000	35,600	14.00	11.50	43,500	34,800	44,500	8.50	28,000	1,555	9121624
	ASPT49D14A*	44,500	35,200	14.50	12.00	43,000	34,400	44,000	8.50	27,600	1,430	9121653
	ASPT59C14A*	45,000	35,600	14.00	12.00	43,500	34,800	44,500	8.20	27,600	1,430	9121654
	ASPT61D14A*	45,000	35,600	14.50	12.00	43,500	34,800	44,500	8.50	27,600	1,555	9121655
	CA*F4961*6D*+EEP+TXV	45,000	35,600	14.00	11.50	43,500	34,800	45,000	9.00	27,600	1,555	9121625
	CA*F4961*6D*+MBVC1600**-1A*	45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,500	9121626
	CA*F4961*6D*+MBVC1600**-1A*+TXV	45,500	36,000	15.00	12.50	44,000	35,000	44,500	9.00	27,600	1,500	9121627
	CA*F4961*6D*+MBVC2000**-1A*	46,000	36,400	14.50	12.00	44,500	35,400	44,500	9.00	27,600	1,570	9121628
	CA*F4961*6D*+MBVC2000**-1A*+TXV	46,000	36,400	15.00	12.50	44,500	35,400	44,500	9.00	27,600	1,570	9121629
	CHPF4860D6D*+EEP+TXV	45,000	35,600	14.00	11.50	43,500	34,800	44,500	9.00	27,600	1,555	9121630
	CHPF4860D6D*+MBVC1600**-1A*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,500	9121631
	CHPF4860D6D*+MBVC1600**-1A*+TXV	45,000	35,600	15.00	12.50	43,500	34,800	44,000	9.00	27,600	1,500	9121632

OUTDOOR UNIT	INDOOR UNITS	COOLING RATINGS ^				TVA RATINGS ³		HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI ⁴	HSPF ⁵	Low ⁶		
DZ14SA 0484A* (cont.)	CHPF4860D6D*+MBVC2000**-1A*	45,500	36,000	14.50	12.00	44,000	35,000	44,000	9.00	27,600	1,570	9121633
	CHPF4860D6D*+MBVC2000**-1A*+TXV	45,500	36,000	15.00	12.50	44,000	35,000	44,000	9.00	27,600	1,570	9121634
	CSCF4860N6D*+EEP+TXV	45,000	35,600	14.00	11.50	43,500	34,800	45,000	9.00	27,600	1,555	9121635
	CSCF4860N6D*+MBVC1600**-1A*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,500	9121636
	CSCF4860N6D*+MBVC1600**-1A*+TXV	45,000	35,600	15.00	12.00	43,500	34,800	44,000	9.00	27,600	1,500	9121637
	CSCF4860N6D*+MBVC2000**-1A*	45,500	36,000	14.00	12.00	44,000	35,000	44,000	9.00	27,600	1,570	9121638
	CSCF4860N6D*+MBVC2000**-1A*+TXV	45,500	36,000	15.00	12.50	44,000	35,000	44,000	9.00	27,600	1,570	9121639
DZ14SA 0603A*	ASPT61D14A*	56,500	43,000	14.00	11.50	54,500	42,000	59,000	8.50	36,000	1,800	9121574
	CA*F4961*6D*+EEP+TXV	55,500	42,000	14.00	11.50	53,500	41,000	59,000	8.50	36,600	1,600	9121575
	CA*F4961*6D*+MBVC2000**-1A*	57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,600	1,770	9121576
	CA*F4961*6D*+MBVC2000**-1A*+TXV	57,000	43,500	14.50	12.00	55,000	42,500	59,000	9.00	36,600	1,770	9121577
	CHPF4860D6D*+EEP+TXV	55,000	42,000	14.00	11.50	53,000	41,000	57,000	8.50	36,600	1,600	9121578
	CHPF4860D6D*+MBVC2000**-1A*	57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,000	1,770	9121579
	CHPF4860D6D*+MBVC2000**-1A*+TXV	57,000	43,500	14.50	12.00	55,000	42,500	59,000	9.00	36,000	1,770	9121580
	CSCF4860N6D*+MBVC2000**-1A*	57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,000	1,770	9121581
CSCF4860N6D*+MBVC2000**-1A*+TXV	57,000	43,500	14.00	12.00	55,000	42,500	59,000	9.00	36,000	1,770	9121582	
DZ14SA 0604A*	ASPT61D14A*	56,500	43,000	14.00	11.50	54,500	42,000	59,000	8.50	36,000	1,800	9121640
	CA*F4961*6D*+EEP+TXV	55,500	42,000	14.00	11.50	53,500	41,000	59,000	8.50	36,600	1,600	9121641
	CA*F4961*6D*+MBVC2000**-1A*	57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,600	1,770	9121642
	CA*F4961*6D*+MBVC2000**-1A*+TXV	57,000	43,500	14.50	12.00	55,000	42,500	59,000	9.00	36,600	1,770	9121643
	CHPF4860D6D*+EEP+TXV	55,000	42,000	14.00	11.50	53,000	41,000	57,000	8.50	36,600	1,600	9121644
	CHPF4860D6D*+MBVC2000**-1A*	57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,000	1,770	9121645
	CHPF4860D6D*+MBVC2000**-1A*+TXV	57,000	43,500	14.50	12.00	55,000	42,500	59,000	9.00	36,000	1,770	9121646
	CSCF4860N6D*+MBVC2000**-1A*	57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,000	1,770	9121647
CSCF4860N6D*+MBVC2000**-1A*+TXV	57,000	43,500	14.00	12.00	55,000	42,500	59,000	9.00	36,000	1,770	9121648	

^ Rated in accordance with ANSI/AHRI Standard 210/240

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F


⁴ Rated heating capacity at 47°F outdoor per AHRI 210/240

⁵ HSPF = Heating Seasonal Performance Factor


⁶ Heating capacity at 17°F outdoor

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Daikin Gas Furnace contains the EEP cooling time delay

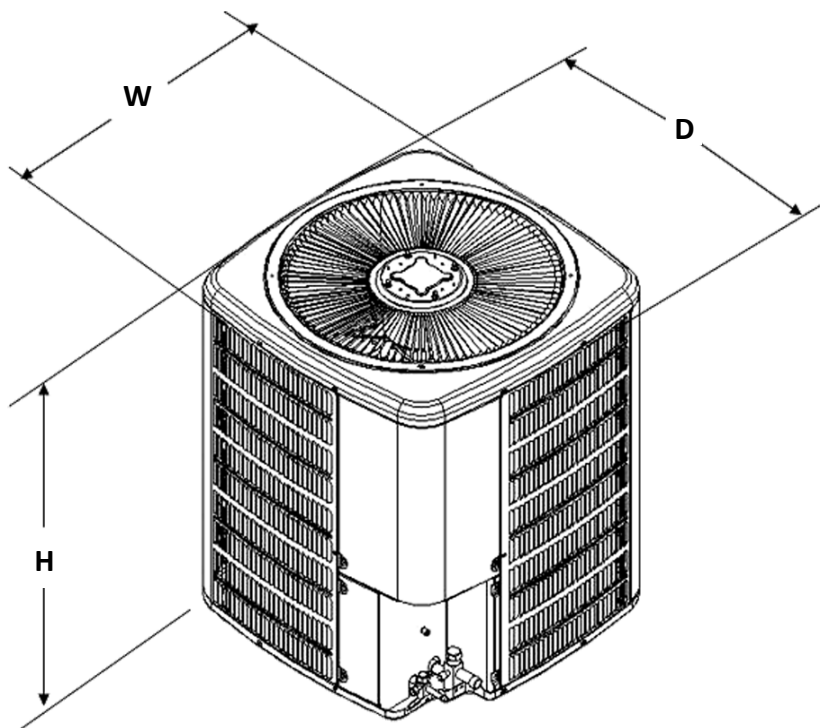

MODEL	DIMENSIONS		
	W"	D"	H"
DZ14SA0363A*	29	29	32¼
DZ14SA0364A*	29	29	32¼
DZ14SA0483A*	29	29	34¼
DZ14SA0484A*	29	29	34¼
DZ14SA0603A*	35½	35½	34¼
DZ14SA0604A*	35½	35½	34¼

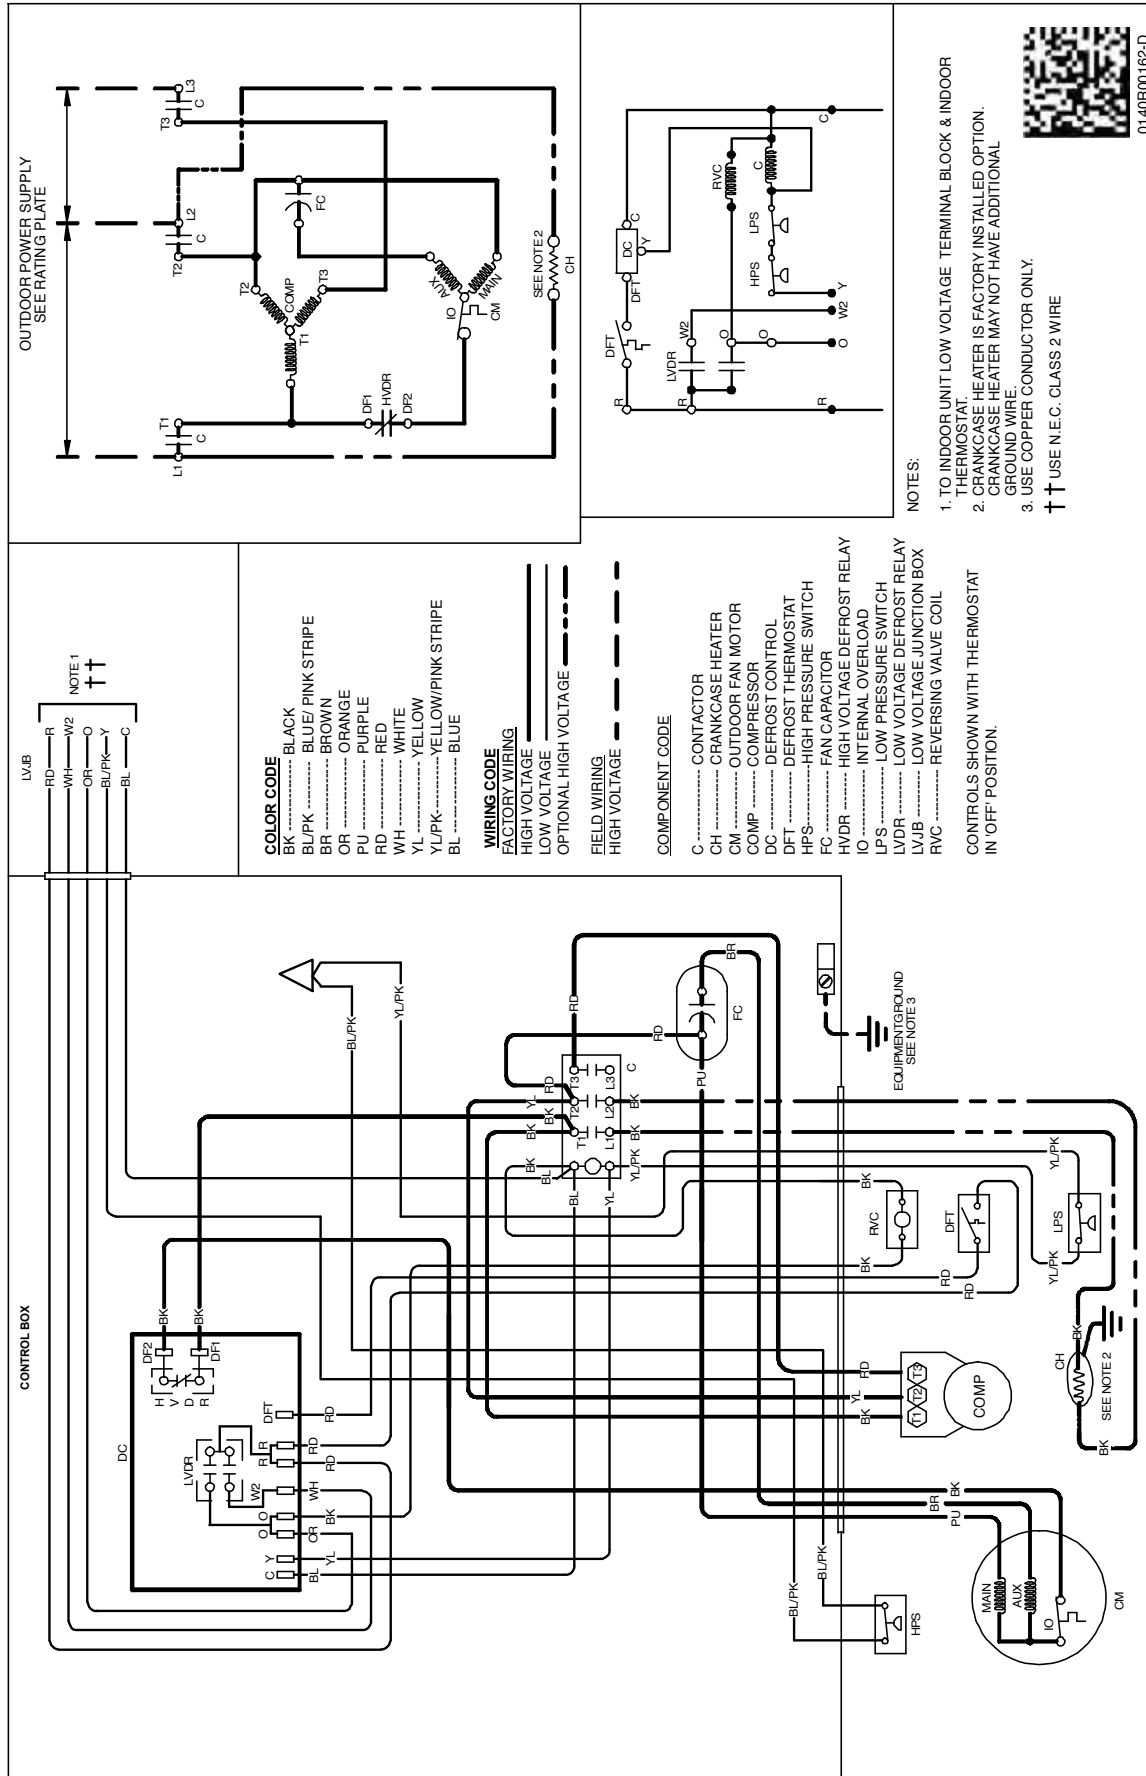

0140R00162-D

WARNING

⚡

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

MODEL #	DESCRIPTION	DZ14SA 0363A*	DZ14SA 0364A*	DZ14SA 0483A*	DZ14SA 0484A*	DZ14SA 0603A*	DZ14SA 0604A*
0130R00000S	Low-pressure Switch Kit	X	X	X	X	X	X
ABK-20	Anchor Bracket Kit ^	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X
AFE18-60A	All-fuel Kit	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X				
CSR-U-2	Hard-start Kit			X	X	X	X
CSR-U-3	Hard-start Kit			X	X	X	X
LAKT-01	Low-ambient Kit	X	X	X	X	X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X
OT18-60A ²	Outdoor Thermostat	X	X	X	X	X	X
OT/EHR18-60	Emergency Heat Relay kit	X	X	X	X	X	X
TX3N4 ²	TXV Kit	X	X				
TX5N4 ²	TXV Kit			X	X	X	X

[^] Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0°F with 50% or higher relative humidity.

³ Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit.